

# POLYETHYLENE BUOY


## GBR-1250

**Diameter: 1.25 m Volume: 0.4 m<sup>3</sup>**  
**For river and port beaconing**

*With its modular and hybrid design, the GBR-1250 is suitable for river and proximity beaconing.*


**Features:**

- 2 segments of float in virgin polyethylene, UV stabilised and precompounded to reduce colour ageing, with standard wall thickness 7 mm
- Polyethylene spar: 0.75 high or 1m high depending on the required focal plane
- Expanded polystyrene (EPS) foaming available as an option
- Central structure in galvanized steel
- Aluminium top mark available as an option

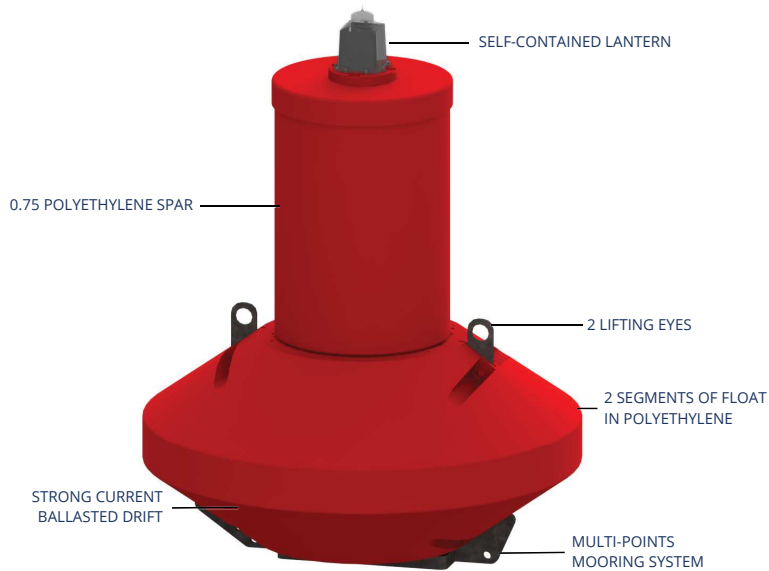

**GBR-1250-CF-0.75**

**Configuration examples:**

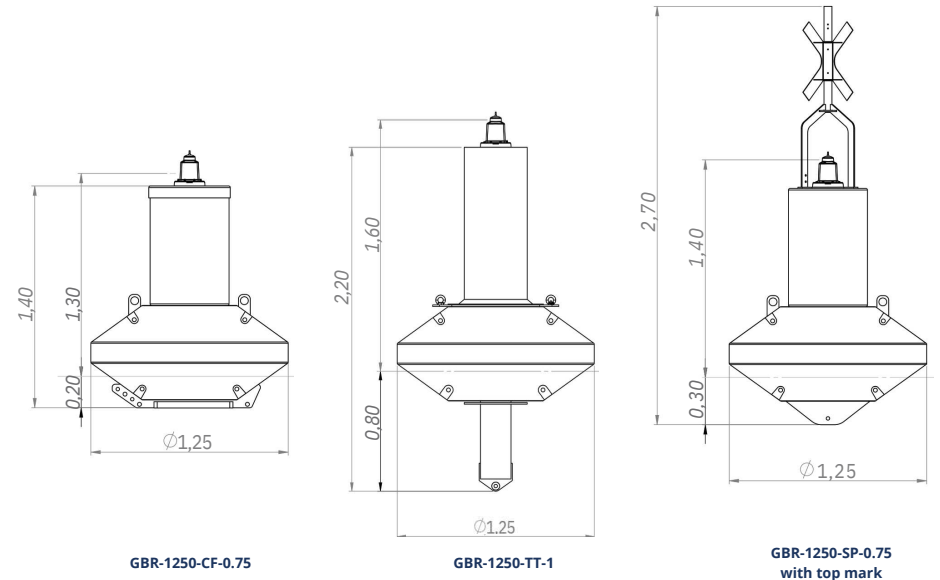

	GBR-1250-CF-0.75	GBR-1250-TT-1	GBR-1250-SP-0.75 with top mark
<b>Diameter (m)</b>	1.25	1.25	1.25
<b>Volume (m<sup>3</sup>)</b>	0.4	0.4	0.4
<b>Total weight (kg)</b>	100	145	80
<b>Reserve buoyancy (m<sup>3</sup>)</b>	0.30	0.28	0.32
<b>Draught (m)</b>	0.2	0.8	0.3
<b>Focal plane (m)</b>	1.30 (with GSC-3)	1.60 (with GSC-3)	1.40 (with GSC-3)
<b>Overall height (m)</b>	1.4	2.4	2.7

Other configurations are available, please contact us at [contact@gisman.fr](mailto:contact@gisman.fr)

**Options available on request:**

- Expanded polystyrene (EPS) foaming
- Radar reflector
- Stickers & retro-reflective tape

Management System approved by LRQA to standards ISO 9001:2015

